

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
25 May 2001 (25.05.2001)

PCT

(10) International Publication Number  
**WO 01/36037 A2**

(51) International Patent Classification<sup>7</sup>: **A61M 37/00**

Howard, A. [US/US]; Four Winterberry Drive, Amherst, NH 03031 (US).

(21) International Application Number: **PCT/US00/42151**

(74) Agents: **WILLIAMS, John, N. et al.**; Fish & Richardson P.C., 225 Franklin Street, Boston, MA 02110-2804 (US).

(22) International Filing Date:  
15 November 2000 (15.11.2000)

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:  
09/440,384 15 November 1999 (15.11.1999) **US**

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(63) Related by continuation (CON) or continuation-in-part (CIP) to earlier application:  
**US** 09/440,384 (CON)  
Filed on 15 November 1999 (15.11.1999)

(71) Applicant (*for all designated States except US*): **VELCRO INDUSTRIES B.V.** [NL/NL]; Castorweg 22-24, Curacao (AN).


**Published:**  
— *Without international search report and to be republished upon receipt of that report.*

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **KINGSFORD,**

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: **SKIN ATTACHMENT MEMBER**

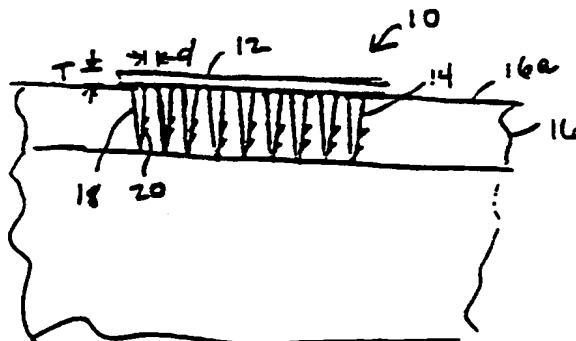

(57) Abstract: A skin attachment member of plastic resin, includes a sheet-form backing, and an array of skin penetrating elements extending integrally from the backing. The skin penetrating elements are configured to penetrate into the epidermal skin layer and are sized to limit painful contact with nerves below the epidermal skin layer. At least many of the skin penetrating elements each include at least one retention barb extending from an outer surface of the skin penetrating element. The barbs are configured to cooperate to resist removal of the skin attachment member from skin. The skin penetrating elements have a cone-shaped body with a pointed tip. The skin penetrating elements can have a groove in their outer surface. The skin attachment member is formed by molding.

WO 01/36037 A2

## SKIN ATTACHMENT MEMBER

### Background of the Invention

The invention relates to an attachment member for securing objects to  
5 skin.

A patch with an array of microneedles which penetrate into the stratum corneum is known. The microneedles are made out of silicon using the same etching process used to manufacture computer chips.

### Summary of the Invention

10 The attachment member of the invention, formed of plastic resin, includes a base layer from which extend an array of many tiny, integral skin-penetrating plastic elements having one or more barbs which lodge in the skin and resist removal of the attachment member. The member is configured such that the elements securely fasten to the skin without penetrating deeply enough to cause pain and discomfort.

15 According to one aspect of the invention, a skin attachment member of plastic resin includes a sheet-form backing, and an array of skin penetrating elements extending integrally from the backing. The skin penetrating elements are configured to penetrate into the epidermal skin layer and are sized to limit painful contact with nerves below the epidermal skin layer. At least many of the skin penetrating elements  
20 each includes at least one retention barb extending from an outer surface of the skin penetrating element. The barbs are configured to cooperate to resist removal of the skin attachment member from skin.

Embodiments of this aspect of the invention may include one or more of the following features.

25 Each skin penetrating element has a cone-shaped body. The base of the cone-shaped body has a diameter of about 0.003". Each skin penetrating element has a length of about 0.012" and a pointed tip. The backing has a thickness in a range of about 0.003" to 0.008".

In an illustrated embodiment, the retention barb is located about 0.008" to  
30 0.0095" along a length of the skin penetrating element from the backing, has a length of about 0.0001", and tapers from a thickness of about 0.0001" to a point at an angle of about 72°. Each skin penetrating element includes, e.g., two barbs.

The skin attachment member has a density of about 400 skin penetrating elements in a 0.01 in<sup>2</sup> area, i.e., 40,000/in<sup>2</sup>. The skin penetrating elements are spaced  
35 apart from each other a distance of about 0.003".

The skin attachment member is formed from nylon, polyethylene terephthalate, or polyester. The skin attachment member is formed by molding.

In an illustrated embodiment, at least many of the skin penetrating elements define at least one groove in an outer surface of the skin penetrating elements. The skin penetrating elements are oriented perpendicular to the backing.

Other features and advantages of the invention will be apparent from the following description, and from the claims.

#### Brief Description of the Drawings

Fig. 1 is a highly magnified side view of a section of a skin attachment member according to the invention shown secured in the epidermis;

Fig. 2 is a diagrammatic perspective view of the section of the skin attachment member of Fig. 1;

Fig. 3A is a side view of a skin-penetrating element of the skin attachment member of Fig. 1;

Fig. 3B is a another side view of the element of Fig. 3A, rotated 90 degrees relative to Fig. 3A;

Fig. 3C is an end view of the element of Fig. 3A taken along lines 3C-3C in Fig. 3A;

Fig. 3D is a cross-sectional view of the element of Fig. 3A taken along lines 3D-3D in Fig. 3B;

Fig. 4 is a perspective view of section A of Fig. 3B showing a barb of the element of Fig. 3A;

Fig. 5 shows an alternative embodiment of a barb;

Fig. 6A is a diagrammatic representation of a molding machine for forming the skin attachment member of Fig. 1;

Fig. 6B shows a mold roll, pressure roll, and trim roller of the molding machine of Fig. 6A;

Fig. 6C is an enlarged view of the mold roll and pressure roll of the molding machine;

Fig. 7A is a side view of the mold roll of Fig. 6A;

Fig. 7B is a cross-sectional view of the mold roll, taken along lines 7B-7B in Fig. 7A;

Fig. 7C is an end view of the mold roll, taken along lines 7C-7C in Fig. 7B;

Fig. 7D is a magnified side view of portion 7D of the mold roll of Fig. 7A;

Fig. 7E shows laser machining of the mold roll; and

Fig. 8 shows an alternative edge formation on a mold roll.

Description of the Preferred Embodiments

Referring to Figs. 1 and 2, a skin attachment member 10, formed of plastic resin, includes a backing 12 and multiple, parallel rows of integrally molded, pointed  
5 projections or elements 14 extending from backing 12 for penetrating into the epidermis 16. The skin-penetrating elements 14 each include a cone-shaped body 18 with one or more discrete barbs 20 extending from the body for securing skin attachment member 10 to epidermis 16.

The length of elements 14 is selected such that they do not penetrate so far  
10 into the skin as to contact nerves located below the outer layers of the epidermis, as to cause significant pain and discomfort, but are long enough to cooperate with each other to provide sufficient adhesion to the skin. Elements 14 can be sized to extend into the portion of skin lying below the stratum corneum layer of the skin because of the small size of elements 14 and the spacing between nerves at this depth. For  
15 example, referring also to Fig. 3A, plastic elements 14 have a length, L, of about 0.012". Since the thickness of the epidermis varies, for example, with age, the location on skin, and the gender of the patient, the length of elements 14 can be selected for the particular use.

Cone 18 tapers from a larger diameter proximal base 22 to a distal pointed  
20 tip 24. The conical shape and sharp point of elements 14 ease their penetration into epidermis 16. The diameter of base 22 is selected to be large enough to help prevent breaking off of the projecting elements 14 from backing 12, while limiting the size of the opening made in the outer surface 16a of epidermis 16. For example, cone 18 has a base diameter, D, of about 0.003". Backing 12 has a thickness, T, in a range of  
25 about 0.003" to 0.008" to provide member 10 with sufficient handling characteristics.

The skin-penetrating projecting plastic elements 14 can be other than conical in shape. For example, elements 14 can be in the shape of a pyramid, a tetrahedron, or may be elliptical or square in cross-section, tapering to points at their distal ends. Rather than taper distally, elements 14 can progressively step down in  
30 diameter. Regardless of the particular shape selected, the elements 14 include sharp pointed tips 24 to ease tissue penetration.

Referring to Figs. 4A and 4B, projecting elements 14 are shown with two discrete barbs 20a, 20b for retaining elements 14 in the skin, though fewer or more barbs can be disposed on cone 18 to provide the desired retention characteristics. The  
35 location of barbs 20 can be selected to take advantage of the greater elasticity of the skin portions lying below the stratum corneum to provide greater holding force. For

example, barb 20a has a top surface 23a located a distance,  $d_1$ , of about 0.008" from base 22, and barb 20b has a top surface 23b located a distance,  $d_2$ , of about 0.0095" from base 22.

Referring to Fig. 4, which is an enlarged view of section A of Fig. 3B, barbs 20a, 20b are roughly half-pyramids, each having a flat upper surface 23a which is perpendicular to a longitudinal axis, A, of the projecting element 14, and sloped sides 28a, 28b. Barbs 20a, 20b have a length,  $l$ , of about 0.0001", and a thickness,  $t$  (Fig. 3d), of about 0.0001", which tapers to a point 26 at an angle,  $\alpha$ , of about 72°.

In use, due to the elasticity of the skin, member 10 is secured to skin surface 16a by surrounding of the barbs by the epidermis. To improve retention of member 10 to the skin, the barbs can be angled as shown in Fig. 5. Here, a barb 20c has a sloped upper surface 23c.

The density of projecting elements 14 on backing 12 depends on use. For example, in high strain applications, a higher density provides better skin attachment, whereas, in applications in which member 10 is not subjected to high strain, a lower density is better for limiting the possibility of inflammation. If the density is too high, it can require too much force for elements 14 to penetrate into the skin. A density of 400 projecting elements in a 0.1 in<sup>2</sup> area provides good skin attachment while not requiring excessive insertion force. In this case the projecting elements 14 are preferably spaced apart a distance,  $d$  (Fig. 1), of about 0.003".

Member 10 and its projecting elements 14 are preferably formed from a thermoplastic, biocompatible polymer, which is stiff enough to penetrate skin but not brittle, and capable of filling a mold and retaining its molded form. Example of suitable polymers include nylon, polyethylene terephthalate, and polyester.

Referring to Fig. 3C and 3D, if desired for use in, for example, drug delivery, the projecting elements 14 include longitudinal grooves 30 in an outer surface 32 of cone 18, here four grooves 30 being shown, which provide passages for drug delivery. The penetration of elements 14 into the epidermis facilitates the delivery of drugs through the epidermis by reducing the thickness of the skin barrier to the vascular layer below the epidermis.

Other uses of member 10 include securing an intravenous or other catheter to the skin, such as securing in place a port for peritoneal dialysis, thus replacing a suture or a butterfly or acting secondary to a suture, acting as bandaid type wound closure to hold two sections of skin together, as wound covering, as a delivery system for self-delivery of drugs, in veterinary applications, as a reaction indicator, for time release vaccination, in agricultural applications such as bundle ties limiting damage to

produce, and in geotextile applications. Incorporated in the polymer from which member 10 is formed can be bacteria killing agents or medication.

Skin attachment member 10 can be molded as a continuous strip 10' according to the principles described in Fischer, U.S. Patent 4,794,028, hereby  
5 incorporated by reference.

For example, referring to Figs. 6A-6C, a molding machine 40 includes an extruder 42 which delivers an extrusion of molten plastic material between a pair of rollers 44, 46 mounted for rotation in opposite directions. Roller 44 is a cooled mold roll having a set of stacked parallel plates 48 (Fig. 7B) in which edge formations 50  
10 define rows of projecting element-mold cavities 52. Roller 46 is a pressure roll which coacts with mold roll 44 for formation of continuous strip 10'.

Molten resin is continuously extruded and applied with pressure against mold roll 44 using pressure roll 46. Molten resin is forced into mold cavities 52 and between rolls 44, 46, to form the projecting elements 14 integral with backing 12.  
15 After cooling while on the roll, the continuous strip 10' is stripped from mold roll 44, the projecting elements 14 undergoing temporary elastic deformation to achieve release from the mold cavities 52.

A trim roller assembly 60 is mounted above mold roll 44 such that continuous strip 10' is removed or stripped from mold roll 44 immediately upstream  
20 of trim roller assembly 60. Trim roller assembly 60 can include two rollers, as shown Fig. 6A, or one roller, as shown in Fig. 6B. A tensioning roller assembly 62 creates tension in member 10 for effecting the removal of strip 10' from mold roll 64. Downstream of tensioning roller assembly 62 is a winder 64 for winding continuous strip 10' on spools 66 for subsequent shipment, storage and use.

Referring to Figs. 7A and 7B, mold roll 44 includes a series of stacked  
25 plates 48 having edge formations 50 on either side of each plate. When stacked, plates 48 together define projecting element-forming cavities 52 within which projecting elements 14 are formed. Plates 48 also define water passages 68 for cooling of member 10'.

Referring to Fig. 7D, which is an enlarged view of section 7D of Fig. 7A, plates 48 of mold roll 46 can be formed by etching a cone shape 70 for a length of about 0.004" from roll edge 72. The remaining tip portion 74 of the cone is formed by laser machining (Fig. 7E) in which a laser 80, under computer position control, is used to remove material from the plate to form the tip portion. Barb impressions 20a'  
30 and 20b' can also be formed using laser machining. The laser can also be controlled to form grooves 30 in cone 18. The mold rolls are preferably formed of beryllium

copper, the temperature of which is controlled during molding such that the resin does not cool too fast during application.

Fig. 8 shows an alternative embodiment of a mold cavity in which a first plate 48 defines an edge formation 50 as described above, and a second plate 48' defines an edge formation 50' having a tip 94 terminating prior to a tip 92 of edge formation 50. Thus, distal tip 24 of element 12 is defined by tip 92.

While skin attachment member 10 has been described as including multiple, parallel rows of projecting elements 14, the mold rolls can be arranged such that the rows of elements 14 are offset or otherwise distributed on backing 12. The projecting elements 14 can also be formed such that their longitudinal axes are not perpendicular to backing 12 or are distributed at various angles to backing 12. While enough of the projecting elements 14 should include barbs 20 to provide the desired degree of securement to the skin, not all of projecting elements 14 need include barbs 20.

Other embodiments are within the scope of the following claims.  
What is claimed is:

1. A skin attachment member of plastic resin, comprising:  
a sheet-form backing, and  
an array of skin penetrating elements extending integrally from the  
backing, the skin penetrating elements being configured to penetrate into the  
epidermal skin layer and sized to limit painful contact with nerves below the  
epidermal skin layer,  
at least many of the skin penetrating elements each including at least one  
retention barb extending from an outer surface of the skin penetrating element, the  
barbs configured to cooperate to resist removal of the skin attachment member from  
skin.
2. The skin attachment member of claim 1 wherein each skin  
penetrating element comprises a cone-shaped body.
3. The skin attachment member of claim 2 wherein a base of the  
cone-shaped body has a diameter of about 0.003".
4. The skin attachment member of claim 1 wherein each skin  
penetrating element includes a pointed tip.
5. The skin attachment member of claim 1 wherein each skin  
penetrating element has a length of about 0.012".
6. The skin attachment member of claim 1 wherein the backing has a  
thickness in a range of about 0.003" to 0.008".
7. The skin attachment member of claim 1 wherein the at least one  
retention barb of each skin penetrating element is located about 0.008" to 0.0095"  
along a length of the skin penetrating element from the backing.
8. The skin attachment member of claim 1 wherein the at least one  
retention barb of each skin penetrating element has a length of about 0.0001".
9. The skin attachment member of claim 1 wherein the at least one  
retention barb of each skin penetrating element tapers from a thickness of about  
0.0001" to a point at an angle of about 72°.

10. The skin attachment member of claim 1 wherein of each skin penetrating element includes two barbs.
- 5 11. The skin attachment member of claim 1 having a density of about 400 skin penetrating elements in a 0.1 in<sup>2</sup> area.
12. The skin attachment member of claim 1 wherein the skin penetrating elements are spaced apart from each other a distance of about 0.003".
- 10 13. The skin attachment member of claim 1 formed from nylon.
14. The skin attachment member of claim 1 formed from polyethylene teraphthalate.
- 15 15. The skin attachment member of claim 1 formed from polyester.
16. The skin attachment member of claim 1 formed by molding.
- 20 17. The skin attachment member of claim 1 wherein at least many of the skin penetrating elements define at least one groove in an outer surface of the skin penetrating elements.
- 25 18. The skin attachment member of claim 1 wherein the skin penetrating elements are oriented perpendicular to the backing.

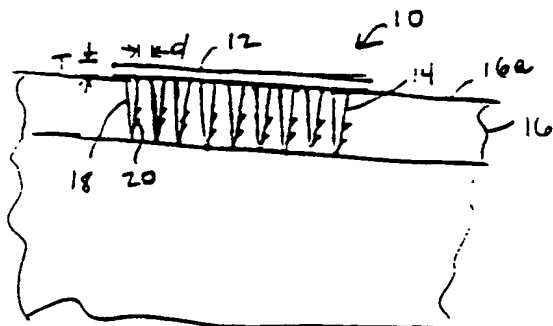


Fig. 1









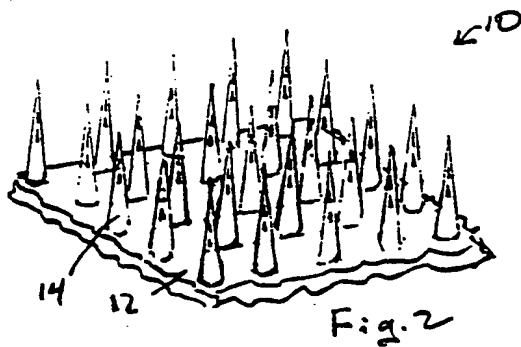


Fig. 2

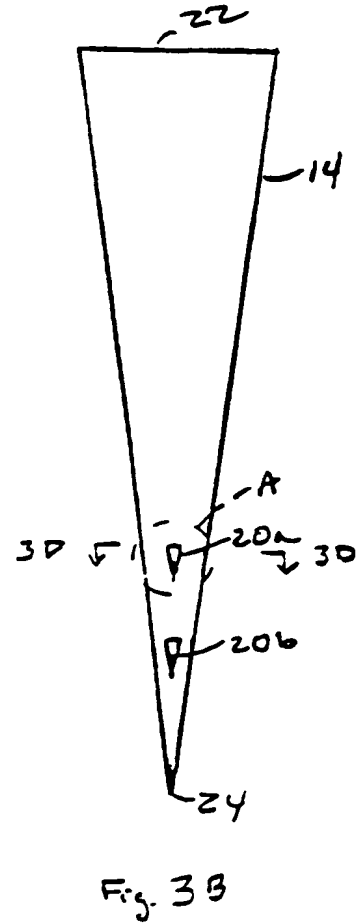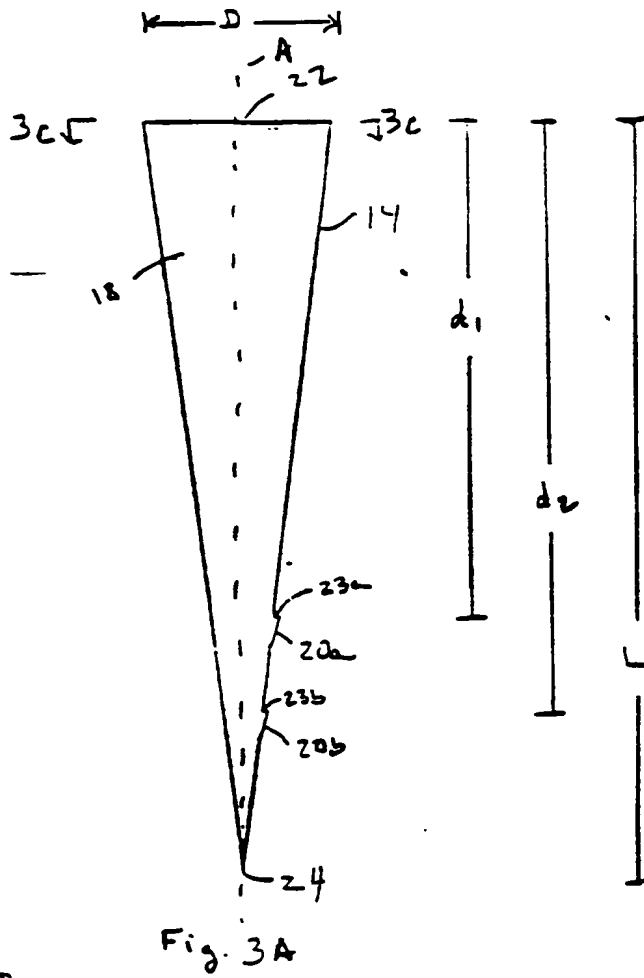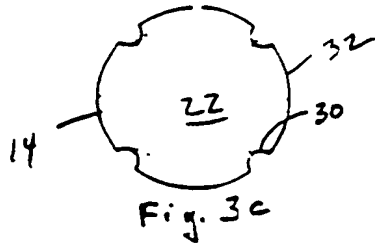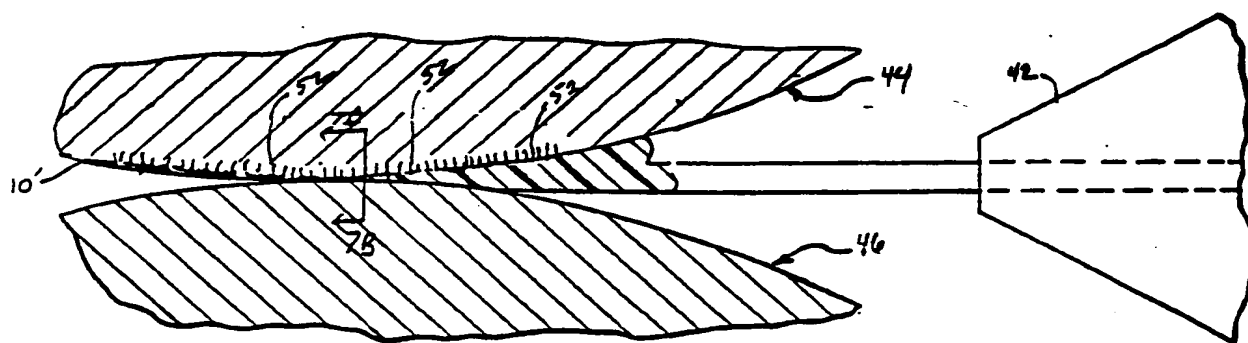

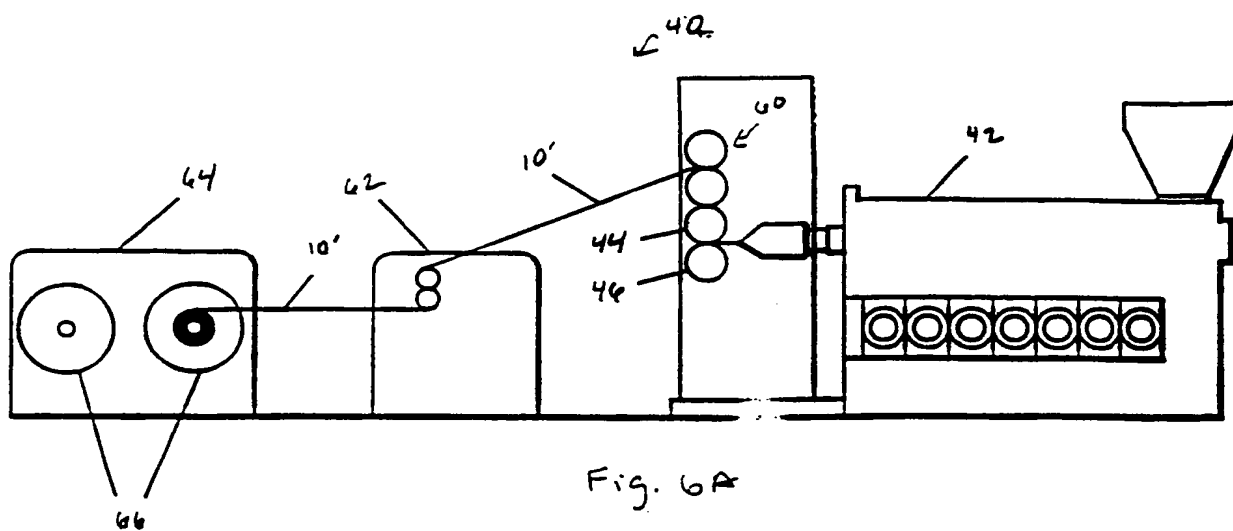

4/6

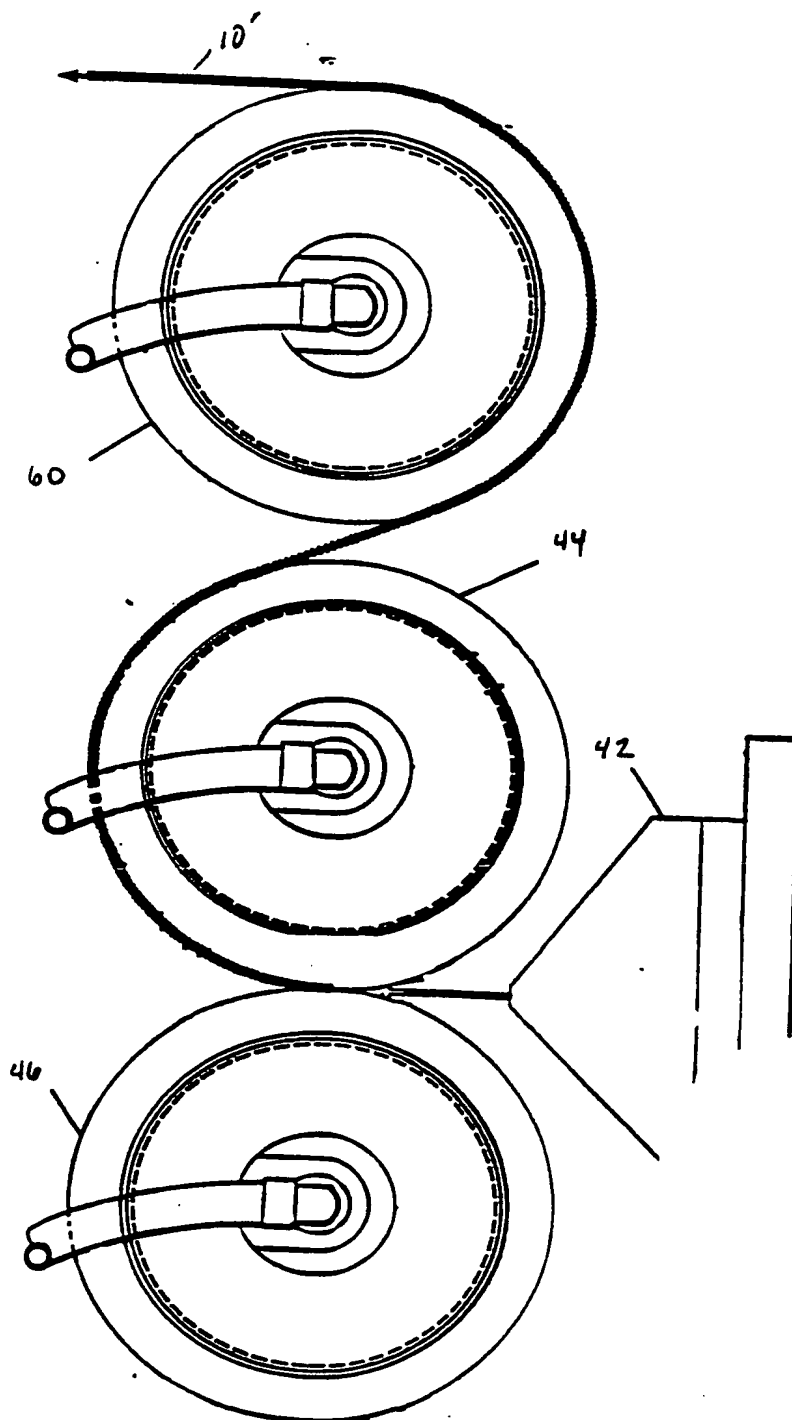
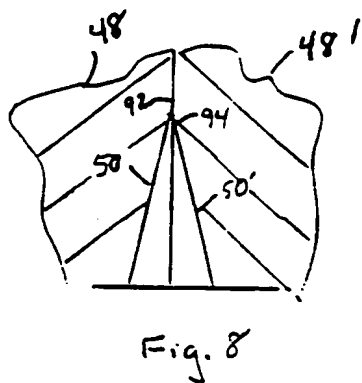
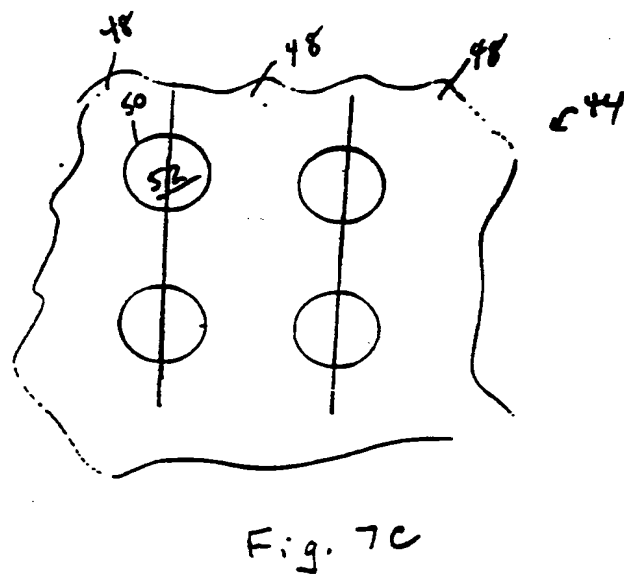
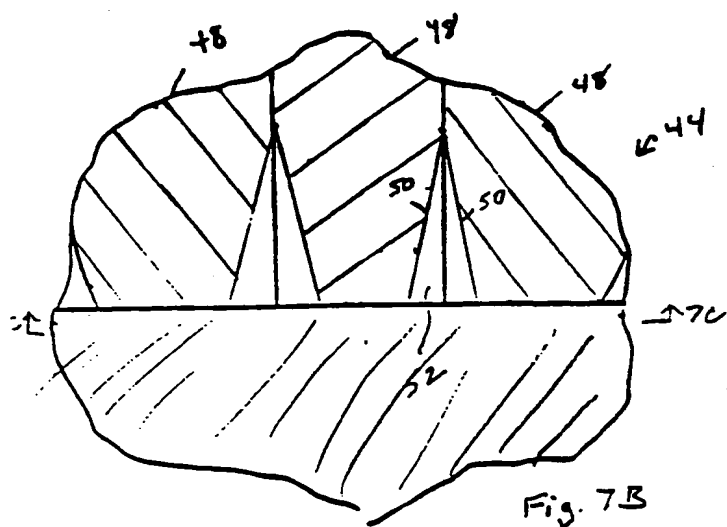
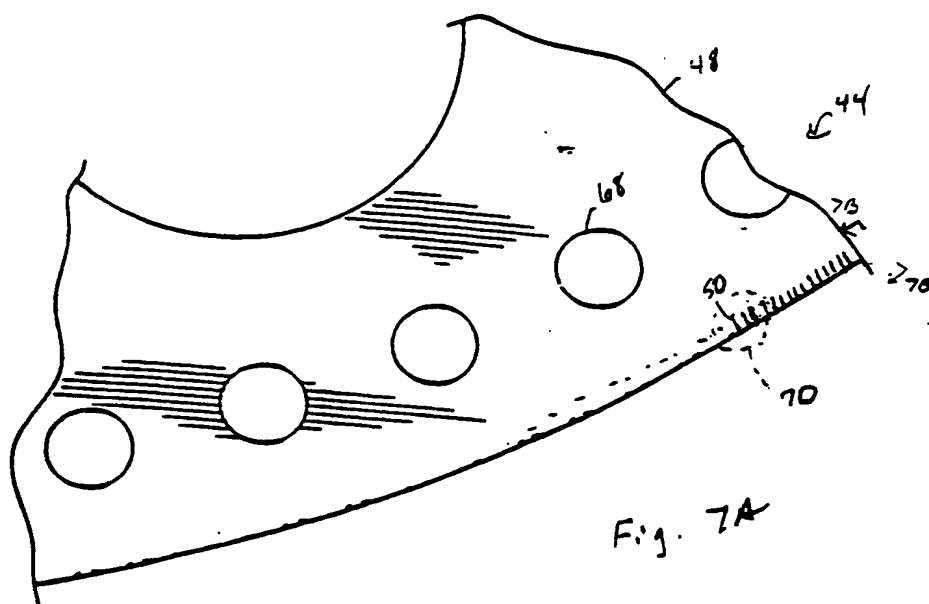


FIG. 6B

5/6



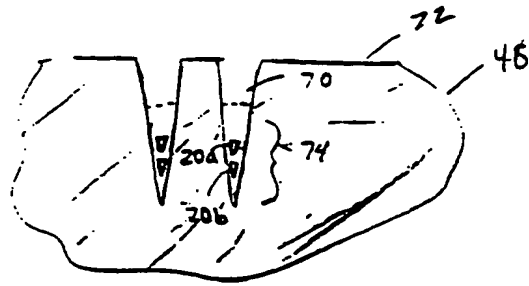


Fig. 7D

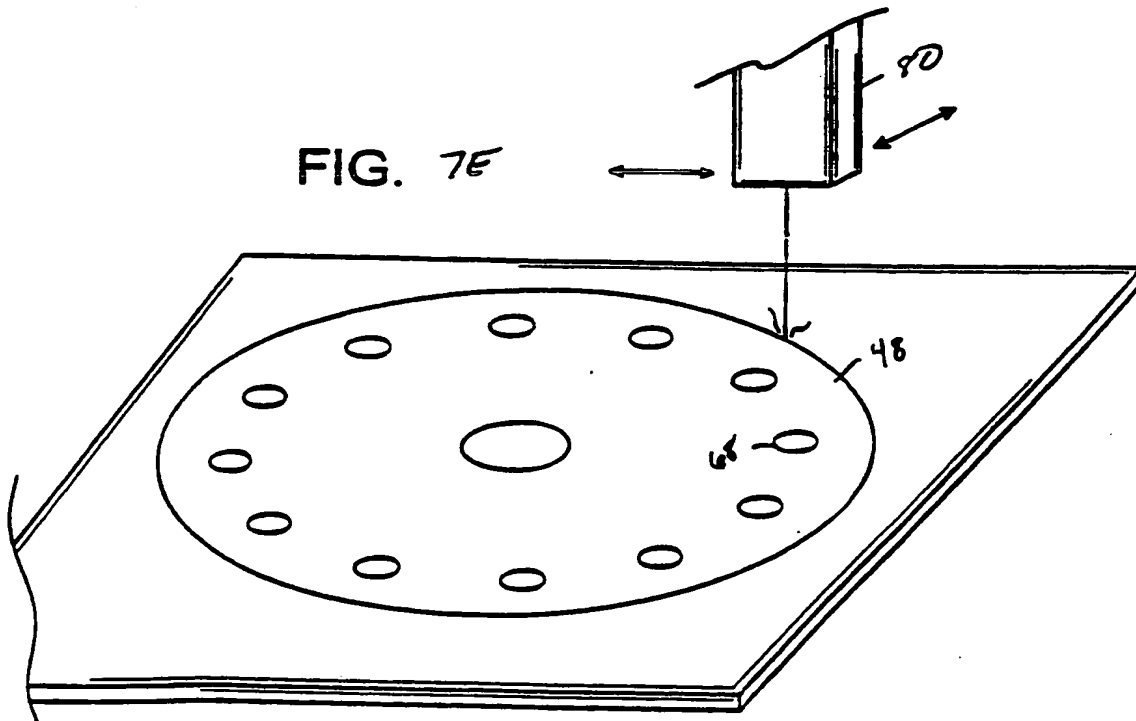


FIG. 7E



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
25 May 2001 (25.05.2001)

PCT

(10) International Publication Number  
**WO 01/36037 A3**

- (51) International Patent Classification<sup>7</sup>: **A61M 25/02**
- (21) International Application Number: **PCT/US00/42151**
- (22) International Filing Date:  
15 November 2000 (15.11.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
09/440,384 15 November 1999 (15.11.1999) US
- (63) Related by continuation (CON) or continuation-in-part (CIP) to earlier application:  
US 09/440,384 (CON)  
Filed on 15 November 1999 (15.11.1999)
- (71) Applicant (for all designated States except US): **VELCRO INDUSTRIES B.V.** [NL/NL]; Castorweg 22-24, Curacao (AN).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **KINGSFORD, Howard, A.** [US/US]; Four Winterberry Drive, Amherst, NH 03031 (US).
- (74) Agents: **WILLIAMS, John, N. et al.**; Fish & Richardson P.C., 225 Franklin Street, Boston, MA 02110-2804 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report
- (88) Date of publication of the international search report:  
8 November 2001
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SKIN ATTACHMENT MEMBER

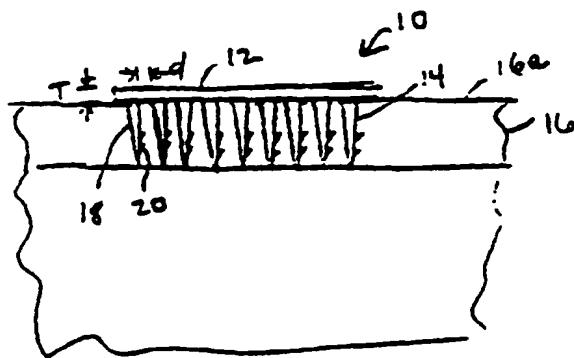

(57) Abstract: A skin attachment member (10) of plastic resin, includes a sheet-form backing (12), and an array of skin penetrating elements (14) extending integrally from the backing. The skin penetrating elements are configured to penetrate into the epidermal skin layer and are sized to limit painful contact with nerves below the epidermal skin layer. At least many of the skin penetrating elements (14) each include at least one retention barb (20) extending from an outer surface of the skin penetrating element. The barbs are configured to cooperate to resist removal of the skin attachment member from skin. The skin penetrating elements have a cone-shaped (18) body with a pointed tip (24). The skin penetrating elements can have a

groove (30) in their outer surface (32). The skin attachment member is formed by molding.

WO 01/36037 A3

# INTERNATIONAL SEARCH REPORT

Internati Application No  
PCT/US 00/42151

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A61M25/02

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 133 307 A (NESS RICHARD A) 9 January 1979 (1979-01-09) column 2, line 54 - line 65; figures 3,5	1-9
Y	---	10
X	US 3 964 482 A (GERSTEL MARTIN S ET AL) 22 June 1976 (1976-06-22) column 7, line 1 - line 60; figure 7	1-9, 11-18
A	US 4 164 943 A (FOUNTAIN GORDON H ET AL) 21 August 1979 (1979-08-21) column 2, line 5 - line 48; figures 2-4	1-18
A	WO 98 11937 A (DEKA PRODUCTS LP) 26 March 1998 (1998-03-26) page 9, line 21 -page 11, line 3; figures 1,6-8	1
	--- -/-	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

### \* Special categories of cited documents :

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*Z\* document member of the same patent family

Date of the actual completion of the international search

21 May 2001

Date of mailing of the international search report

30/05/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Ehrsam, F

# INTERNATIONAL SEARCH REPORT

Internat Application No  
PCT/US 00/42151

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 497 620 A (UNIV CARNEGIE MELLON) 5 August 1992 (1992-08-05) column 4, line 15 -column 6, line 50; figures 6,11-13	10

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Internati Application No  
PCT/US 00/42151

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4133307	A	09-01-1979	NONE	
US 3964482	A	22-06-1976	NONE	
US 4164943	A	21-08-1979	NONE	
WO 9811937	A	26-03-1998	EP 0934093 A US 5983136 A	11-08-1999 09-11-1999
EP 0497620	A	05-08-1992	US 5312456 A AT 169090 T DE 69226384 D DE 69226384 T JP 6323310 A US 5569272 A US 5676850 A	17-05-1994 15-08-1998 03-09-1998 17-12-1998 25-11-1994 29-10-1996 14-10-1997

Form PCT/ISA/210 (patent family annex) (July 1992)